

NON INSULATED DUCT FAN WITH CIRCULAR CONNECTIONS

CK 200 A1

7000427

- Duct fan with circular connections.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Low sound levels.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- For speed control a transformer or electronic speed controller can be connected.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system.
- A duct connected fan can be installed outside or in damp environments.
- Easy installation in any position.




ACCESSORIES

- Mounting bracket Kit MB
- Mounting clamp MK 200
- Safety grille BSV 200
- Back draught shutter RSK 200
- Louvre YG 200
- Louvre shutter VK 200
- Filterbox FLK 200
- Filterbox FLF 200
- Silencer LDC 200
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 1.0
- Local Demand Controller Kit


TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz (60 Hz)
Phase	1 ~
Current	0.57 A
Power	129 W
Speed	2630 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	43 dB(A)
Weight	4.1 kg
Enclosure class	44 IP
Wiring diagram	4040001


PRESSURE/FLOW

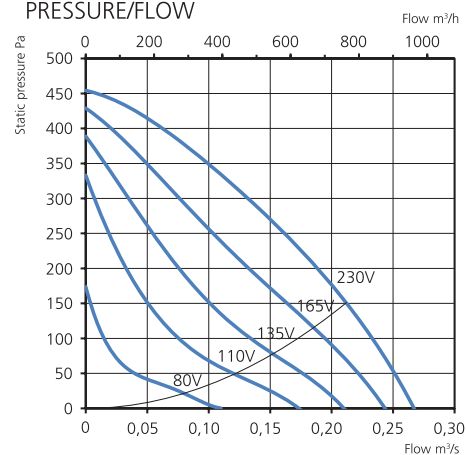

POWER/FLOW

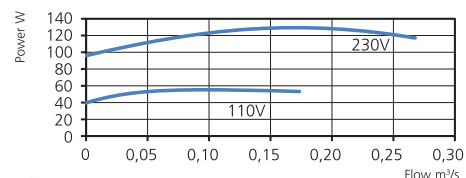

SFP

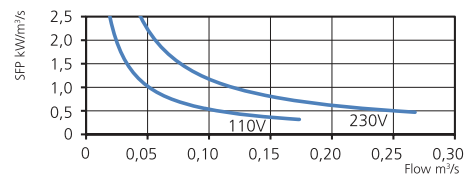

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	50	17	31	40	46	46	40	38	31
Outlet 230 V	76	60	62	71	69	65	68	68	60
Inlet 230 V	75	54	61	68	69	65	68	67	57
Inlet 165 V	71	51	59	66	66	60	63	60	51
Inlet 135 V	67	48	57	61	61	55	59	54	43
Inlet 110 V	62	43	53	55	55	49	58	41	34
Inlet 80 V	50	34	46	44	43	39	33	24	18

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

