





- Wall fan with circular inlet connection.
- KV has a square mounting plate.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Suitable for a wide variety of applications.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system, mounted on the inside wall.
- Easy installation in any position.
- Can be used in damp environments.
- To comply with the ErP 2018 regulation, a local demand controller must be used.


### PRESSURE/FLOW

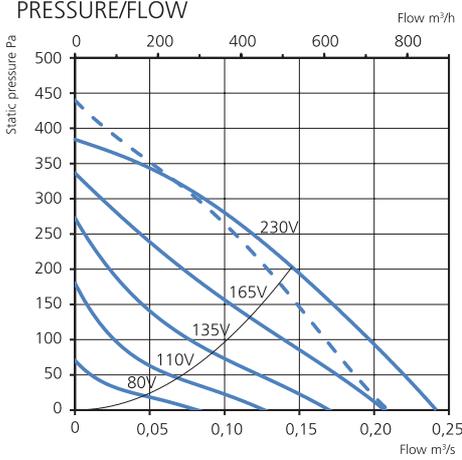

### POWER/FLOW

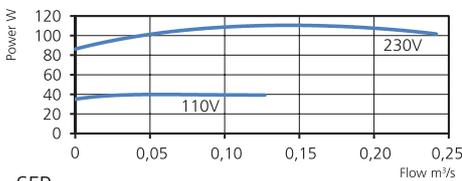

### SFP

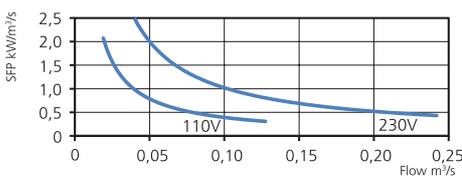

--- Without duct

### TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Current	0.48 A
Power	111 W
Speed	2490 r.p.m.
Max. temp of transported air	75 °C
Sound pressure level, 3 m	43 dB(A)
Weight	3.5 kg
Enclosure class	44 IP
Wiring diagram	4040001

### ACCESSORIES

- Mounting clamp MK 160
- Safety grille BSV 160
- Safety grille BSR 355
- Back draught shutter RSK 160
- Louvre shutter VK 355
- Silencer LDC 160
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 1.0
- Local Demand Controller Kit

### SOUND DATA

	L <sub>WA</sub> tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	50	18	34	40	46	44	42	38	29
Outlet 230 V	70	33	41	54	64	67	65	60	50
Inlet 230 V	72	55	59	67	67	63	61	61	53
Inlet 165 V	67	52	56	62	61	57	55	54	45
Inlet 135 V	61	49	52	57	55	51	51	46	35
Inlet 110 V	54	44	47	50	48	43	41	36	23
Inlet 80 V	45	38	39	40	37	32	23	20	11

### MORE INFORMATION



Find out the latest updated information about this product by visiting [www.ostberg.com](http://www.ostberg.com) or scanning this QR code.

### DIMENSIONS

