

NON INSULATED WALL FAN WITH CIRCULAR CONNECTIONS

RS 125 A1

7400003

- Exhaust wall fan with circular inlet connection.
- Designed for mounting on external wall.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- Black painted for high durability.
- To comply with the ErP 2018 regulation, a local demand controller must be used.




ACCESSORIES

- Back draught shutter RSK 125
- Silencer LDC 125
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 0.5
- Local Demand Controller Kit


TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz (60 Hz)
Phase	1 ~
Current	0.2 A
Power	45 W
Speed	1400 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	56 dB(A)
Weight	3.4 kg
Enclosure class	44 IP
Wiring diagram	4040002


PRESSURE/FLOW

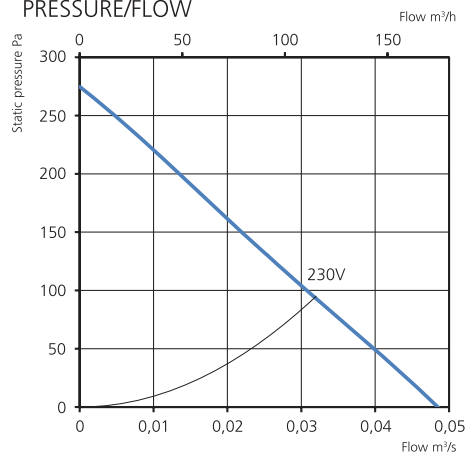

POWER/FLOW

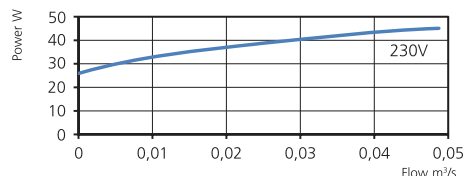

SFP

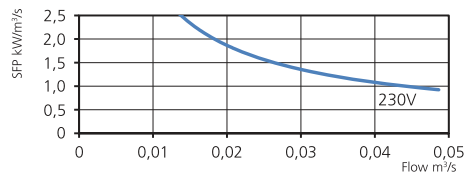

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	63	48	37	52	57	59	55	45	37
Inlet 230 V	64	50	54	58	59	57	51	42	30

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

