

NON INSULATED WALL FAN WITH CIRCULAR CONNECTIONS


RS 125 C1 EC

7400043




- Exhaust wall fan with circular inlet connection.
- Designed for mounting on external wall.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Fan housing is manufactured from galvanized sheet steel.
- Black painted for high durability.


PRESSURE/FLOW

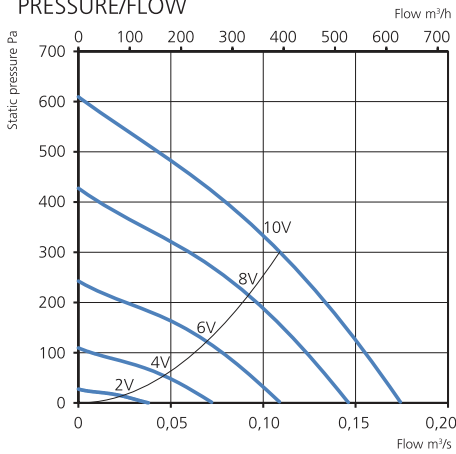

POWER/FLOW

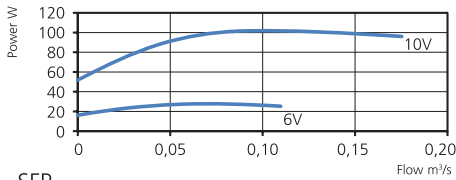

SFP

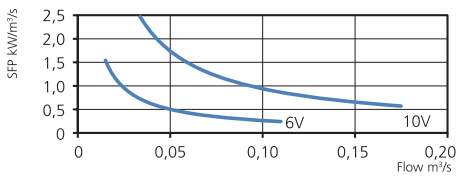

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	0.84 A
Power	103 W
Speed	3640 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	70 dB(A)
Weight	2.5 kg
Enclosure class	44 IP
Wiring diagram	4040153

SOUND DATA

	L _{wa} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	77	41	48	62	72	72	72	67	58
Inlet 10 V	83	59	64	71	81	74	72	68	61
Inlet 8 V	79	57	61	71	77	70	68	64	56
Inlet 6 V	71	53	55	66	67	63	60	55	45
Inlet 4 V	61	47	49	56	56	52	49	40	27
Inlet 2 V	43	32	31	38	39	33	23	14	6

ACCESSORIES

- Back draught shutter RSK 125
- Silencer LDC 125
- Speed controller MS EC
- Controller IQ-Reg EC
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

