





- Exhaust wall fan with circular inlet connection.
- Designed for mounting on external wall.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Fan housing is manufactured from galvanized sheet steel.
- Black painted for high durability.


PRESSURE/FLOW

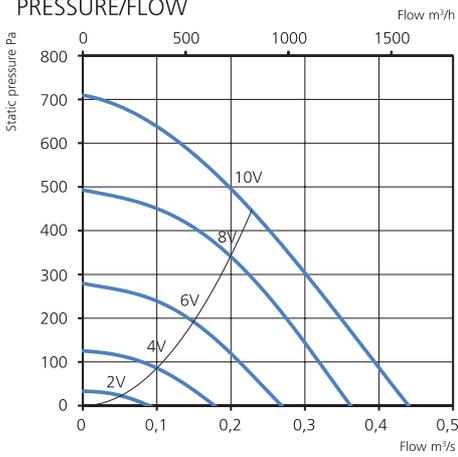

POWER/FLOW

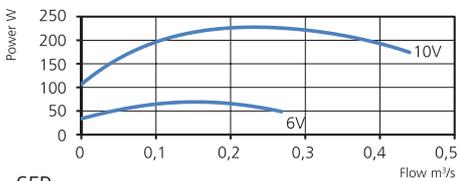

SFP

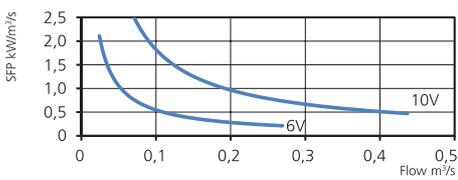

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	1.74 A
Power	228 W
Speed	2890 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	70 dB(A)
Weight	8.9 kg
Enclosure class	44 IP
Wiring diagram	4040153

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	77	44	52	63	70	69	72	68	59
Inlet 10 V	76	59	61	68	72	69	68	66	63
Inlet 8 V	73	53	58	65	68	65	64	63	58
Inlet 6 V	66	47	53	60	60	58	57	57	47
Inlet 4 V	56	39	45	51	51	47	49	41	31
Inlet 2 V	40	27	33	35	34	27	20	23	15

ACCESSORIES

- Back draught shutter RSK 250
- Silencer LDC 250
- Speed controller MS EC
- Controller IQ-Reg EC
- Plejd Controller
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS

