





- Exhaust wall fan with circular inlet connection.
- Designed for mounting on external wall.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Fan housing is manufactured from galvanized sheet steel.
- Black painted for high durability.


PRESSURE/FLOW

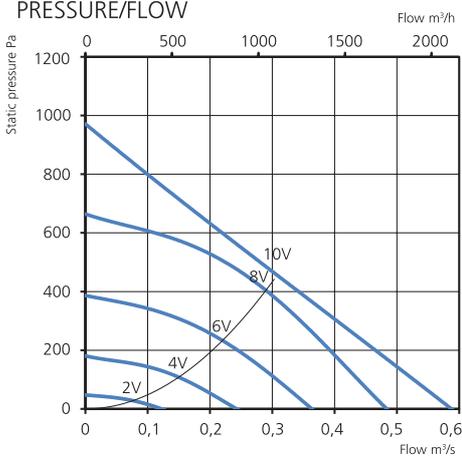

POWER/FLOW

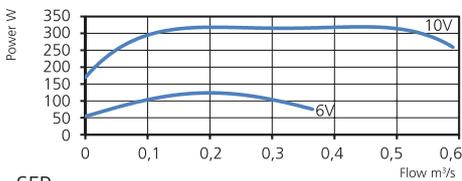

SFP

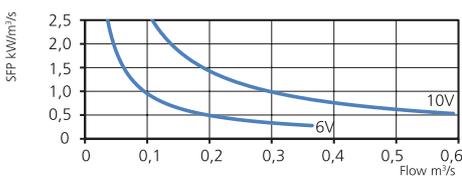

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	2.26 A
Power	318 W
Speed	2750 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	71 dB(A)
Weight	10.6 kg
Enclosure class	44 IP
Wiring diagram	4040153

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	78	45	54	64	71	72	73	67	61
Outlet 10 V									
Inlet 10 V	78	59	63	69	72	70	72	69	67
Inlet 8 V	76	57	61	67	71	68	70	67	65
Inlet 6 V	70	52	56	63	64	62	63	61	56
Inlet 4 V	61	44	49	55	55	52	55	52	40
Inlet 2 V	44	32	37	39	38	34	32	24	16

ACCESSORIES

- Back draught shutter RSK 315
- Silencer LDC 315
- Speed controller MS EC
- Controller IQ-Reg EC
- Plejd Controller
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS

