





- Roof fan with square connection.
- Horizontal outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb, TFU to TKS.
- The fan complies with environmental requirement M2.


PRESSURE/FLOW

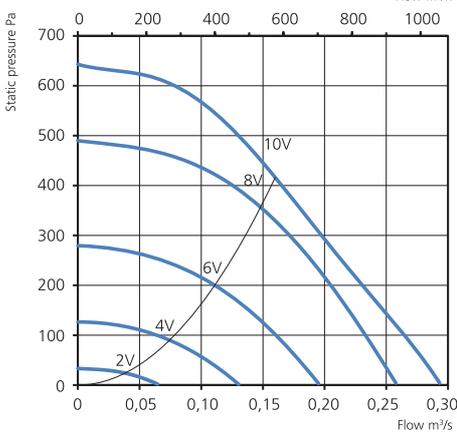

POWER/FLOW

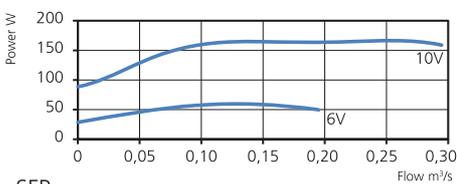

SFP

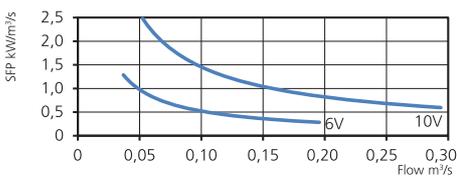

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	1.35 A
Power	166 W
Speed	3210 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	70 dB(A)
Weight	6.3 kg
Enclosure class	44 IP
Wiring diagram	4040153

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	77	46	51	61	73	71	69	65	53
Inlet 10 V	76	60	65	69	71	67	66	64	57
Inlet 8 V	74	59	63	67	70	65	64	62	54
Inlet 6 V	67	54	58	60	62	58	57	54	45
Inlet 4 V	58	47	51	52	52	50	46	39	30
Inlet 2 V	42	33	36	38	34	30	23	18	6

Available in following design:

Black	7210104
Brick red	7210105

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

