

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 300 C1 EC

7340126

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.
- The fan complies with environmental requirement M2.




ACCESSORIES

- Roof curb TFU 300
- Connection plate TFU 300
- Back draught shutter TFU 300
- Speed controller MS EC
- Controller IQ-Reg EC
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R


TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	0.83 A
Power	102 W
Speed	3580 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	71 dB(A)
Weight	5.0 kg
Enclosure class	44 IP
Wiring diagram	4040153


PRESSURE/FLOW

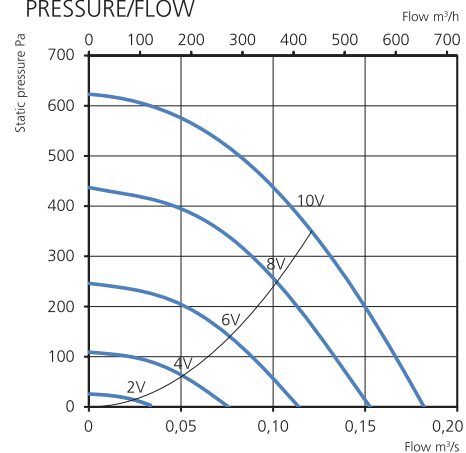

POWER/FLOW

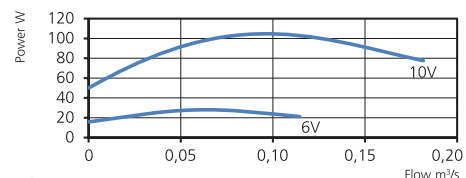

SFP

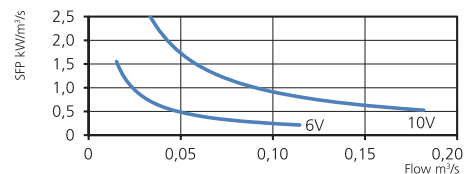

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	78	46	52	62	71	71	74	69	62
Inlet 10 V	78	60	70	71	71	69	69	68	63
Inlet 8 V	76	59	68	68	69	67	67	66	58
Inlet 6 V	69	57	58	63	62	61	61	59	44
Inlet 4 V	60	52	50	53	54	52	53	41	27
Inlet 2 V	44	33	33	37	40	38	19	15	6

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

Available in following design:

Tegelröd	7340127
Galvanized	7340138

DIMENSIONS (mm)

(mm)

