

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 400 B1

7340027

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.
- The fan complies with environmental requirement M2.




ACCESSORIES

- Roof curb TFU 400
- Connection plate TFU 400
- Back draught shutter TFU 400
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 0.5


TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz (60 Hz)
Phase	1 ~
Current	0.45 A
Power	103 W
Speed	2510 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	66 dB(A)
Weight	7.6 kg
Enclosure class	44 IP
Wiring diagram	4040001


PRESSURE/FLOW

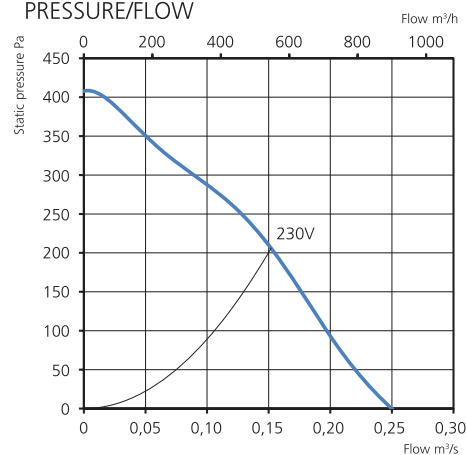

POWER/FLOW

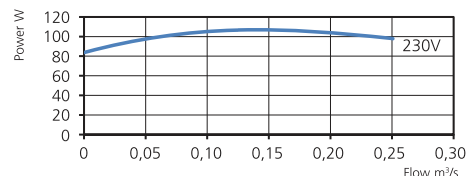

SFP

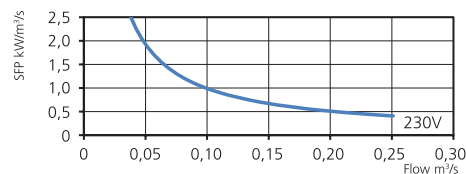

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	73	42	47	61	69	67	68	65	51
Inlet 230 V	75	56	62	70	70	67	64	62	53

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

(mm)

