





- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.


PRESSURE/FLOW

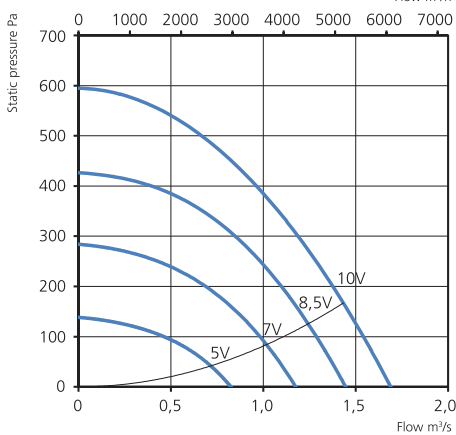

POWER/FLOW

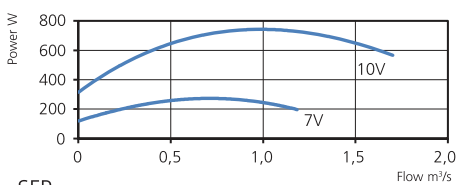

SFP

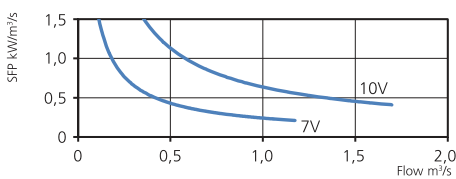

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	3.41 A
Power	747 W
Speed	1410 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	71 dB(A)
Weight	40.9 kg
Enclosure class	54 IP
Wiring diagram	4040145

SOUND DATA

	L _{wa} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	78	47	64	71	73	73	70	66	63
Inlet 10 V	80	64	71	74	75	71	67	64	65
Inlet 8.5 V	76	61	68	71	72	67	63	60	62
Inlet 7 V	72	58	65	66	66	61	59	60	51
Inlet 5 V	63	53	55	57	56	51	50	54	31

Available in following design:

Black C4	7351043
Galvanized	7351003

ACCESSORIES

- Roof curb TFU 660
- Connection plate TFU 660
- Back draught shutter TFU 660
- Controller IQ-Reg EC
- Speed controller MS EC
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

(mm)

