

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 760 F3 EC

7351029

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.




ACCESSORIES

- Roof curb TFU 760
- Connection plate TFU 760
- Back draught shutter TFU 760
- Controller IQ-Reg EC
- Speed controller MS EC
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R


TECHNICAL DATA

Voltage	400 V
Frequency	50/60 Hz
Phase	3 ~
Current	5.4 A
Power	3550 W
Speed	1630 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	84 dB(A)
Weight	76.3 kg
Enclosure class	54 IP
Wiring diagram	4040147


PRESSURE/FLOW

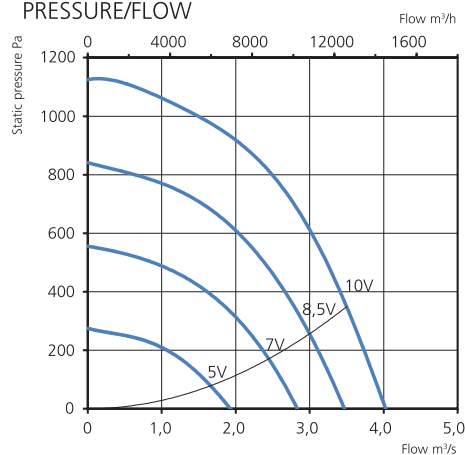

POWER/FLOW

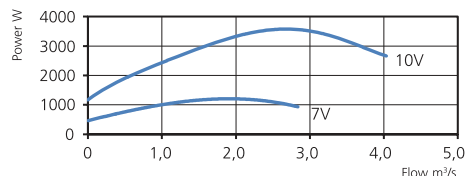

SFP

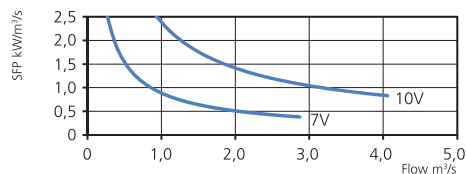

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	91	70	80	83	84	84	82	79	78
Inlet 10 V	94	72	86	87	85	85	83	81	87
Inlet 8.5 V	90	69	82	82	81	80	79	76	84
Inlet 7 V	84	66	77	77	75	74	73	70	78
Inlet 5 V	75	68	65	67	65	65	64	69	56

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

Available in following design:

Black C4	7351049
Galvanized	7351009

DIMENSIONS (mm)

(mm)

